

# MACbond B 2680


- GENERAL INTRODUCTION
- PRODUCT DESCRIPTION
- TYPICAL APPLICATION
- CHARACTERISTICS
- RESISTANCE
- SHELF LIFE

**MACbond**

- is an assembling system consisting of a thin carrier (paper, non woven, film or others), coated on both sides with a uniform layer of adhesive.
- The adhesives used are pressure-sensitive acrylic polymer or synthetic rubber based formulations.
- is produced in roll or sheet format with a single or double release liner, so that the product chosen best suits the customer's needs.

**MACbond B 2680** consists of a tissue carrier coated on both sides with an acrylic adhesive.

**MACbond B 2680** is produced in self wound format on a paper liner.

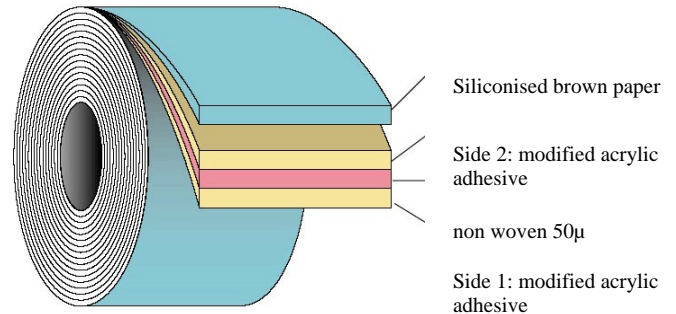

Good resistance to temperature, appropriate for open pore material, impregnated foam, cellular PE, cellular rubber, soft PVC and felt fabric lamination.

### Adhesion with Substrates

<b>Metal / Aluminium</b>	High	<b>Textile/Cotton</b>	High
<b>Glass / Ceramics</b>	High	<b>Rubber/EPDM</b>	High
<b>Painted Surface</b>	High	<b>Acrylic/PET</b>	High
<b>Wood/Board/Paper</b>	High	<b>Polystyrene</b>	High
<b>Soft PVC</b>	Medium	<b>PP/PE/PS</b>	High
<b>Rigid PVC</b>	High	<b>Smooth substrate</b>	High
<b>PC/ABS</b>	High	<b>Rough substrate</b>	High

Low resistance to water, plasticizers and alcohol, and low outdoor resistance. Not recommended for use in contact with aliphatic or aromatic hydrocarbons, For further technical advice, please consult with MACTac,

2 years when stored at 15/25°C and 50% relative humidity.

**ADHESIVE DATA**

	TYPICAL VALUES (*)	TEST METHOD
Quick Tack (N/25mm) on stainless steel	19	FTM 9
Peel 180°- (N/25mm) on stainless steel		
- after 20 minutes	31	FTM 1
- after 24 hours	31	FTM 1
Shear on stainless steel 1kg-25 mm x 25mm (hours)	> 150	FTM 8

**CARRIER DATA**

	TYPICAL VALUES (*)	TEST METHOD
Thickness (μ)	50	ISO 534
Tensile (N/15mm) (min.)	MD 6,5 CD 5	DIN 53455
Elongation (%) (max.)	MD 10 CD 10	DIN 53455

**TEMPERATURE RESISTANCE**

Minimum application temperature	- 10°C	
End-use temperature range	-40°C to + 90°C	
Short term resistance	+ 130°C	S.A.F.T. 500grs

*For temperatures outside those quoted above, please consult with MACtac.*

**RELEASE LINER THICKNESS (Carrier+Adhesive)**

Silicone paper Brown of 90gr/sqm		ISO 536
170 μ		ISO 534

(\*) Values given are typical and are not necessarily for use in specifications.

**IMPORTANT NOTICE**

All MACtac products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning MACtac products are based upon research which the Company believes to be reliable but such information do not constitute a warranty. Because of the variety of possible uses for MACtac products and the continuing development of new uses, the purchaser should carefully consider the fitness and performance of the product for each intended use and the purchaser assumes all risks in connection with such use. Seller shall not be liable for damages in excess of the purchase price of the product or for incidental or consequential damages. All specifications are subject to change without prior notice.

